



**MGI**  
Digital Graphic Technology

# **METEOR DP8700 XL +**

*Multi-Substrate XL Digital Press  
Paper, Plastics & Envelopes  
330 x 1,200 mm - 13 x 47"*



**New**

***Innovation in Motion***

## Printing on Paper, Plastics and Envelopes



- Paper from 65 to 400 Gsm
- Plastic and synthetics from 100 to 400 µm
- Envelopes up to 150 Gsm

## Printing Formats from 100x148mm up to XL+ 330 x 1,200 mm



- Extend your capabilities and impress your customers
- Tri-fold in A3 portrait or landscape
- Folded brochure up to 1,200 mm long
- Optimize your prints with more n-up: Letterhead, business card, book cover, brochure, mailing piece, invitation card, etc.

## Precise Registration Including in Duplex



- Auto-adjusting offset feeder table
- Quick format changes
- Registration at  $\pm 2/10^\circ$  mm
- New automatic skew and centering adjustment
- Duplex jobs professionally registered
- Automatic duplexing up to 300 Gsm

## Enhanced Color Management



- Compliant with FOGRA39-ISO 12647 standard
- Pantone+ and Spot Colors fully controlled
- High color stability from first to last page
- Professional color management tools i1 Pro 2
- New powerful Fiery RIP FS100 Pro to control and automate production flow

## Envelope Production with EnvelopeExpress Pro



- All standard formats (DL/C5/C4 - 6x9"/#10)
- Fast in production, up to 3,000 DL/hour
- On-the-fly envelope reloading
- All kinds of envelopes, with/w-o windows
- Unleash the power of VDP envelopes
- Deliver high value products to your customers

## Productivity with Digital Finisher Pro Inline module




- Print and Finish in one pass, one operator
- Trim, Crease and Perforate alone or combined
- Up to 4,260 finished sheets/hour
- From 105 x 148 mm to 330 x 1,200 mm
- With pass-through mode when necessary



Flyer



Tickets



Invitation Card



Photobook



Menu



Book Cover



# ALL THE + OF YOUR DIGITAL PRESS



## Printing capabilities up to 330 x 1,200 mm and 400 Gsm

The Digital Press **Meteor DP8700 XL+** opens you the doors to an even larger spectrum of profitable applications.

A truly an unique digital press that allows for a large choice of formats combined with a broad range of substrates and thicknesses now up to 400 Gsm.

Thanks to the various input systems, there is always a solution to handle the required substrate at hand:

- The auto-adjusting offset feeder table feeds substrates from 100 x 200 mm up to the optionnal XL+ format of 330 x 1,200 mm
- The pneumatic feeder allows to load 3,000 sheets in the above formats and up to 400 Gsm/400 µm.
- The two internal trays with a total paper capacity of 1,500 sheets handle formats ranging from 140 x 182 mm to 330 x 487 mm
- The bypass is convenient way to load sheets from 100 x 148 mm to 330 x 1,200 mm and up to 50 envelopes at any time.
- The overall productivity allows for:
  - ✓ up to 4,260 A4 sheets per hour
  - ✓ or 2,280 A3 sheets per hour
  - ✓ or 1,200 330 x 650 mm sheets per hour
  - ✓ and 600 330 x 1,200 mm sheets per hour



## Enhanced Print Registration

The new **Meteor DP8700 XL+** includes new systems to deliver a more precise and automated print registration.

- The fully automated offset feeder table has a tolerance of  $\pm 2/10^\circ$  mm registration to all substrates loaded
- The new Automated Skew and Centering Adjustment (ASCA) system allows for on-the-fly registration. This involves several step motors and optical sensors and works without any operator involvement. The ASCA system is enabled for each printed side, allowing a very high and consistent registration for all automatic duplex jobs.



## Professional Color Management



The new **Meteor DP8700 XL+** has major enhancements to color fidelity and rendering thanks to new toner and the new Fiery RIP FS100 Pro.

- The toner uses more components from the biomass, (i.e from vegetal sources) which reduces environmental impact. They are melting at a lower temperature, requiring less electricity power to print. The warming-up stages are reduced. The toner are using denser dyes and smaller and more regular particles for larger gamut and delivering richer tones and colors.
- During production the color stability is continuously monitored thanks to a the on-board **spectro-photodensitometers**. The external calibration is ensured with Eyeone Pro provided as standard. Furthermore, it allows for color management optimization and allows you to create your own color and substrates profiles.
- Thanks to the new Fiery RIP FS100 Pro, all your printed files are processed under the latest industry standard ISO Fogra39-12647. The color management is improved and the color produced are similar with other printing devices (offset, plotter, flexo) that are compliant with this standard.
- The Fiery RIP provides various tools to optimize and customize your prints without having to go back to pre-press.
- Variable data printing using PPML, FreeForm or Creo VPS workflows will satisfy your most demanding needs and will bring added value to all your jobs (mailing pieces, envelopes with printed address, fidelity cards, ...).



# METEOR DP8700 XL+

Discover the new XL+ format, 330 x 1,200 mm - 13 x 47"

## Substrates

**Paper** from 65 to 400 Gsm, 17 lb bond up to 147 lb cover / 16 pt  
Coated matte or glossy, card stock, textured, carbonless and standard offset papers.

## Plastics and Synthetics

From 100 to 400 µ PVC  
4 mil to 18 mil  
Polycarbonate, polyester, PET, vinyl, Teslin® and more...

## Format

Min. size: 100 x 148 mm / 3.9 x 5.8"

Max. size (standard):  
330 x 650 mm / 13 x 26"

**Max. size (with option):**  
330 x 1,200 mm / 13 x 47"

Automatic duplex up to  
300 Gsm / 136 lb bristol / 12-pt.

## Envelopes

With or w/o windows

Formats include DL, C5 & C4  
6 x 9", #10 etc.

Paper weight up to 150 Gsm.



## New Toner

**Includes green technologies**

New formula with components from the biomass.

New denser dyes with smaller particles for a large gamut and more vibrant colors.

New higher yield toner cartridges.



## Intelligent Substrate Management




Dedicated touch screen with built-in **substrate library** which automatically adjusts all print settings inside the engine to optimize the printability of each paper, envelope and plastic. Maximize productivity by saving specific heat, Infrared and transfer settings for later recall.



## Auto-adjusting Offset Feeder Table

The **auto-adjusting offset feeder table** will automatically adjust the side lay guides on the press to best correspond to all of your formats, adjusting even for paper skew.

A new variable strength suction transport belt allows for a **± 0.2 mm registration**. Ultrasonic Double sheet detection system.

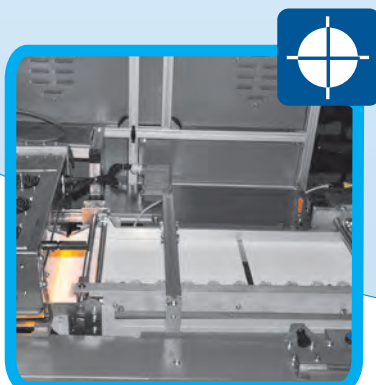

# DISCOVERING NEW HORIZONS, NEW LIMITS

## Up to 4,260 A4 sheets per hour or 2,280 A3 sheets

### High Quality Output up to 3600 dpi/270 lpi



#### Resolution of up to 3600 dpi/270 lpi

3 new stochastic screens with *anti-moiré* feature.  
18 traditional line screens to fit all types of jobs.  
Screens in 130, 150, 170, 200 and 270 lpi.  
256 shades per color (8 bit).  
Two different line screens within the same print job.

### New Powerful EFI RIP




Delivering print almost 2.5 times faster than its predecessor, the new EFI Fiery FS100 Pro platform is ideal for complex jobs with VDP, enhanced color management and workflow automation tools.



### High Capacity Pneumatic Feeder and Stacker

#### Friction free suction feeding

Capacity of 3,000 sheets or 30 cm/12" deep.  
Feed papers up to 400 Gsm/147 lb cover/16 pt. and plastics up to 400 µ/18 mil.  
Feed up to 1,200 mm/47" via optional XL+ Format kit.



#### Stacker

High volume laser guided stacker for output.  
Stack up to 6,000 sheets of paper or 60 cm/23" depth.



### New XL+ Format up to 1,200 mm/47"

1200



A format once reserved solely for the offset world, the **Meteor DP8700 XL+** can print sheets up to 1,200 mm (47") in length, the **ONLY** sheetfed production digital press with this capability. Print personalized banners, calendars, panoramic photographs, brochures, signage and more, all on-demand and in quantities as little as one.

### Efficient Envelope Production

Formats include DL, C5 & C4 / 6 x 9", #10.  
Optional EnvelopeExpress Pro feeder with quick installation allows DL/C5 envelope production.  
EnvelopeExpress Pro is a true margin generator when VDP is involved.

# FREEDOM TO PRINT & PERSONALIZE

## + Freedom to print and personalize envelopes

Envelope production\* can be an instant game changer for your business. Whether you are printing high quality 4-Color logos on envelopes (supplementing an offset run), or printing variable data for direct mail applications, the **Meteor DP8700 XL+** can bring in serious profits for your business. Go from the typical DL envelope all the way to the C5 envelopes with or w/o windows, all on demand.



An ideal solution for short and medium run jobs, **EnvelopeExpress Pro** allows customers to easily integrate four-color process and fully personalized envelope (with variable data) printing capability into their digital portfolio. **EnvelopeExpress Pro** allows for continuous delivery of up to 400\*\* envelopes at a time, maximizing output volume without interruption of the production cycle of up to 3,000 envelopes per hour.



**The EnvelopeExpress Pro** accommodates a wide range of envelope formats (with or without windows) including DL & C5 / 6x9" & #10.

Produce envelopes with bright, vivid colors and variable data to satisfy even the most demanding of customers, while offering true value-added that help increase your margins.

\* An additional and specific fuser is required for envelope production printing

\*\* Using DL envelope at 80 Gsm



Meteor DP8700 XL+ and EnvelopeExpress Pro

## + Variable Data Printing (VDP)

**Meteor DP8700 XL+ : the Power of Personalization and Variable Data Management!**

**Meteor DP8700 XL+** and its RIP offers compatibility with the following variable data printing languages, which are used with most popular VDP software programs:

- PPML 3.0 (PODi certified),
- FreeForm and FreeForm 2,
- Creo VPS.

Manage files “on the fly” or by batch process.  
Variable text, graphics, bar codes and images  
On-demand archiving and reprinting capabilities.

Documents are fully customized to be relevant to your audience, and can be custom-tailored to specific individuals or groups, be it static, personalized, or segmented data. Applications include personalized advertising, automatic numbering, bar codes, alphanumeric databases and photos, on virtually any paper or plastic substrate.



**Full Personalization: customize your content to target your customers individually**





## Paper based Applications from 65 up to 400 Gsm - 17 lb bond up to 147 lb cover - 16pt

Paper based Applications  
from 65 up to 400 Gsm - 17 lb bond up to 147 lb cover



## Plastic Based Applications from 100 up to 400 $\mu$ - 4 MIL up to 18 MIL

Plastic based Applications  
from 100 up to 400  $\mu$  - 4 mil up to 18 mil





# Technical Specifications

## Monochrome and Color Print Speed<sup>(1)</sup>

Up to 4,260 A4/letter pages per hour  
Up to 2,280 A3 pages per hour  
Up to 1,560 330 x 600 mm pages per hour

## New electrophotographic System

256 levels per color (8 bit)  
New long life toner (C,M,Y &K)

## New Print Quality and Line Screens up to 3600 dpi

New predefined line screens, including 3 stochastic screens and 18 traditional line screens ranging from 130 to 270 lpi. High printing quality up to 3,600<sup>(2)</sup> dpi

## Format

- Min: 100 x 148 mm - 3.9 x 5.8"<sup>(3)</sup>
- Max: 330 x 650 mm - 13 x 25.6" standard<sup>(4)</sup> or 330 x 1,200 mm - 13 x 47" with option<sup>(4)</sup>

## Printing Area

New extended printable width up to 323 mm/ 12.7".  
Maximum printable area up to 323 x 1,113 mm/ 12.7 x 43.8" (with option)

## Supported Substrates

- **Paper**  
Weights between 65 to 400 Gsm / 17 lb bond up to 147 lb cover / 16 pt (or 400 µ ± 10 µ).  
Bristol, Matte Coated and Bright, Vergé®, Chromolux®, art papers, carbonless, etc.
- **Plastics**  
Thicknesses between 100<sup>(5)</sup> to 400 µ - 4 mil up to 18 mil  
Print PVC<sup>(6)</sup>, Polyester, Polycarbonate, PET, Vinyle, Autotype, Teslin®, Yupo®, Melinex®, Agfa Synaps®, Canvas/Buckram, etc.
- **Envelopes**  
Envelopes with or without windows, paper weight up to 150 Gsm

## Input

- **2 trays**  
1,500 sheets total capacity (500 + 1,000 sheets)  
Weights from 65 up to 260 Gsm or 10 pt  
All sizes included from 140 x 182 mm to 330 x 487 mm<sup>(7)</sup>  
5.5 x 7.2" to 13 x 19" - Ability to link trays
- **Bypass**  
250 sheets capacity from 65 up to 300 Gsm  
Includes formats from 100 x 148 mm to 330 x 1,200 mm (with option) / 3.9 x 5.8" to 13 x 47" DL, C5 & C4 envelopes
- **Integrated Pneumatic Loader**  
3,000 sheets maximum capacity  
Weights from 150<sup>(8)</sup> to 400 Gsm  
or thicknesses from 100 to 400 µ / 4 mil up to 18 mil  
Accepts all formats ranging from 100 x 220 mm to 330 x 1,200 mm / 3.9 x 8.7" to 13 x 47" (with option).  
The feeder module is thermoregulated for the moisture stabilization of substrates

## • EnvelopExpress Pro (option)

A high speed envelope feeder quick to install and allows for the efficient production of envelopes; DL & C5 / 6x9", #10. Up to 3,000 DL envelopes per hour

## Registration

Precise registration  
(± 0,2 mm L-R and front-back, page-page ± 0,5 mm)

## Feeder Table

Feeder table with fully motorized and automatic side lay guide.  
Auto-adjusts for format width and paper skew  
Ultrasonic double sheet detection system

## Infrared Lamp System (IRSL2)

System of infrared lamps for instant heating of substrates. The substrates are preheated before entering the print engine to optimize print surface and maximize quality

## High Capacity Stacker

Top loading  
Laser guided stack adjustment  
Capacity of up to 6,000 sheets @80 Gsm/ 20 lb bond  
Optional envelope stacking table

## New Duplexing Unit

Auto duplex from 2 trays, bypass and offset feeder for substrates up to 300 Gsm/ 136 lb bristol and up to 330 x 487 mm/13 x 19"

## RIP Fiery F5100 Pro - System Windows 7 FES 64-bit

- Intel Core i5 2400 3.1 GHz Processor  
1 TB HDD/ 4 GB RAM / Internal DVD-RW Drive  
Ethernet 10/100/1000 BT / Windows 7 Pro  
22" LCD display / Keyboard / Mouse
- Languages and file formats supported  
Adobe PostScript 1, 2 & 3, Adobe PDF  
PDF/X-1a, 3 and 4, Encapsulated PostScript (EPS)
- Variable Data Printing  
Fiery FreeForm v1 and v2.1, PPML v3.0  
PDF/VT 1 and 2, VPS compatible
- JDF/JMF Support  
JDP v1.2.2 IDP ICS certified, CIP4 certified  
and third-party workflow solutions

## Command Workstation 5.5

- Print queue management utilities with on-demand reprinting. Auto trapping
- Professional color management tool:
  - ✓ Profile management: CMYK (Euroscale Fogra, SWOP) and RGB (sRGB, Adobe RGB)
  - ✓ ICC/ICM (ProfilMaker, ColorMatch)
  - ✓ PANTONE+ certification with "Spot-On"
  - ✓ Built-in automatic color calibration
  - ✓ Integrated automatic calibration and external calibration with i1 Pro2 spectrophotometer
- Two different line screens within the same print job:
  - ✓ One line screen for pictures
  - ✓ One different line screen for text/vector graphics

## Personalization and Variable Data Printing

- 100% compatible with variable data management solutions:  
NEWLEAF & PReS PrintSoft, Bartender Seagull Scientific, Adobe InDesign, QuarkXPress, PrintShop Mail, etc.

## Open Architecture - Mac/PC Compatible

- All DTP applications in both CMYK or RGB  
Quark XPress, Adobe Illustrator, Photoshop, Acrobat, InDesign, Corel Draw, etc. ...
- All Office RGB applications  
Microsoft Word, Excel, Publisher, etc. ...

## Intelligent Substrate Management

- Unlimited customizable library of paper & synthetic substrates
- Substrate specific values for optimized printing include inking transfer, engine temperature, Infrared preconditioning temperature
- Touch screen interface

## Electrical Power

- 230 V VAC ± 10 % ; 50/60 Hz ± 3 %
- 2 plugs 32A + 3 plugs 16A for a total of 15 kW/59A

## Operating Environment

- Required temperatures  
15° to 30°C (59°F to 86°F)  
Optimum between  
18° to 23°C (64° to 73°F)  
Maximum variation of 10°C (50°F) per hour
- Operating Humidity: 30% to 60% RH  
Optimal condition: 40%
- Noise level: 69 dB(A) at 50 Hz

## Regulations and Safety Standards

UL, cUL, FCC-B, DOC, VCCI, CE Marking, C-Tick, CDRH, GOST  
Environmental Standards :  
Energy Star, WEEE, RoHS, REACH,  
Safety Standard: ISO 15 408

## Physical Specifications

- Dimensions (L x H x V): 506 x 181 x 113 cm / 199 x 71 x 44"
- Weight: 1,087 kg / 2,396 lbs

The above specifications are referring to 80 Gsm paper unless otherwise noted. Print speed will vary according to substrate length/ minimum & maximum substrate thickness will apply.

- (1) without calibration and stabilization
- (2) equivalent to 1,200 x 1,200 dpi x 8 bit
- (3) from bypass
- (4) max. paper weight 250 Gsm
- (5) depending upon the material melting point
- (6) supported PVC thickness 200-400 µ
- (7) Max. A3 / 11" x 17" format for tray 1
- (8) 100 Gsm is achievable after MGI's change



Europe/Middle East/Africa/Russia  
161, Avenue de Verdun  
94204 IVRY/Seine Cedex - FRANCE  
Tel : +33 (0)1 45 21 06 60  
Fax : +33 (0)1 45 21 14 90  
info@mgi-fr.com  
www.mgi-fr.com



@MGI\_HQ  
@MGI\_USA



facebook.com/MGIonline



Americas/Caribbean/Asia Pacific  
3143 Skyway Circle  
Melbourne, FL 32934 - USA  
Tel: +1 321 751 6755  
Fax: +1 321 751 6777  
info@mgi-usa.com  
www.mgi-usa.com

Pre-launch brochure.

This is not a contractual document and technical specifications subject to change without notice.  
All the other trademarks cited are marks registered by their respective manufacturers.  
Operator / end-users are invited to submit substrates to MGI for validation.